

实时音频跟踪的高效内置升压2×16W免电感立体声AB/D类音频功放

2×16W Inductor Free, Stereo Class AB/D Amplifier with High-Efficiency Adaptive Audio-Tracking Boost Converter

■ FEATURES

- Output Power ($f_{IN} = 1\text{kHz}$, $R_L = 4\Omega$, BTL)
 $V_{BAT} = 4\text{V}$, 2×10.6W ($V_{OUT} = 10\text{V}$, THD+N = 10%)
 $V_{BAT} = 8\text{V}$, 2×16W ($V_{OUT} = 11.5\text{V}$, THD+N = 10%)
- Selectable mode for Integrated boost converter:
Adaptive Audio-Tracking Output (increasing playback time by more than 50%), adaptive multiple boost output or forced boost output
- Selectable maximum output voltage V_{OUT} (7V, 8V, 9V) and adjustable switch peak current limit
- ACF (Anti-Clipping Function) Integrated
- Class D or Class AB mode
- Differential / Single-ended Analog Input
- Over current protection/ Over temperature protection / Overvoltage protection / Low voltage malfunction prevention function with auto recovery
- Pb-free Packages, ETSSOP20
- 输出功率($f_{IN} = 1\text{kHz}$, $R_L = 4\Omega$, BTL)
 $V_{BAT} = 4\text{V}$, 2×10.6W ($V_{OUT} = 10\text{V}$, THD+N = 10%)
 $V_{BAT} = 8\text{V}$, 2×16W ($V_{OUT} = 11.5\text{V}$, THD+N = 10%)
- 内置升压电路模式可选择：自适应实时音频跟踪升压（可提升播放时间50%以上）、自适应多段升压、强制升压；
- 最大升压值可选择，升压限流值可设置
- ACF防破音功能
- D类或AB类可选
- 模拟差分/单端输入
- 保护功能：过流/过热/欠压异常/过压保护功能
- 无铅无卤封装，ETSSOP20

■ APPLICATIONS

- | | | | |
|----------------------------|---------------------|---------------|----------|
| · Bluetooth/Wi-Fi Speakers | · Portable Speakers | · 蓝牙/ Wi-Fi音箱 | · 便携式音箱 |
| · Smart speakers | · Smart Home | · 智能音箱 | · 智能家居 |
| · Sound Bars | · TV/Monitor | · 声霸 | · TV/监视器 |

■ DESCRIPTION

The HTA8918 is a stereo Class AB/D audio amplifier integrated a boost converter. With wide input voltage range, HTA8918 supports applications with single cell, two cell Lithium batteries, or 5V power supply and so on, and can drive two speakers in BTL mode. It can also work in Class AB mode without boost converter.

HTA8918 built-in boost converter supports selectable output voltage by VSET pin for different applications with different power requirements. It also implements an adjustable switching peak current limit function through external resistors.

The boost converter has 3 modes: Adaptive Audio-Tracking Mode (AATM), adaptive multiple boost mode (AMBM) or forced boost mode. Once in forced mode, the output voltage driving the audio power amplifier is directly boosted to the preset voltage (by VSET pin). If the device is set in AMBM mode, the boost converter can adaptively provide suitable voltage supply for audio power amplifier with maximum value of preset voltage (by VSET pin) to keep high efficiency. If the device is set in AATM, the boost converter can provide an adaptive audio tracking power supply for audio power amplifier with maximum value of preset voltage (by VSET pin) so that the system can always keep high efficiency in the whole output power range. The battery endurance can be improved by more than 50%, compared to forced mode¹.

HTA8918 has a filter-less modulation circuit which can directly drive speakers. HTA8918 can be shut down so that the power consumption can be minimized. As for protection function, over current protection function for speaker output terminals, over temperature protection function, low supply voltage malfunction preventing function and over boost voltage protection are also prepared.

HTA8918 features Anti-Clipping Function (ACF) which detects output signal clip due to the over input signal and suppresses the output signal clip automatically. Also, the ACF function can adapt the output clip caused by power supply voltage down. It can significantly improve the sound quality, creating a very comfortable musical enjoyment, and to protect the speakers from overload damage.

HTA8918是一款内置升压的立体声AB/D类音频功率放大器，其支持单节锂电、双节锂电串联、5V等多种输入，升压后的电压提供给功放供电，功放支持双通道立体声BTL输出。其也可工作在AB类模式，此时无升压。

HTA8918内置的升压电路，可通过VSET脚设置最大升压值，以满足不同的输出功率需求。其还可通过外置电阻调节开关峰值电流限值。

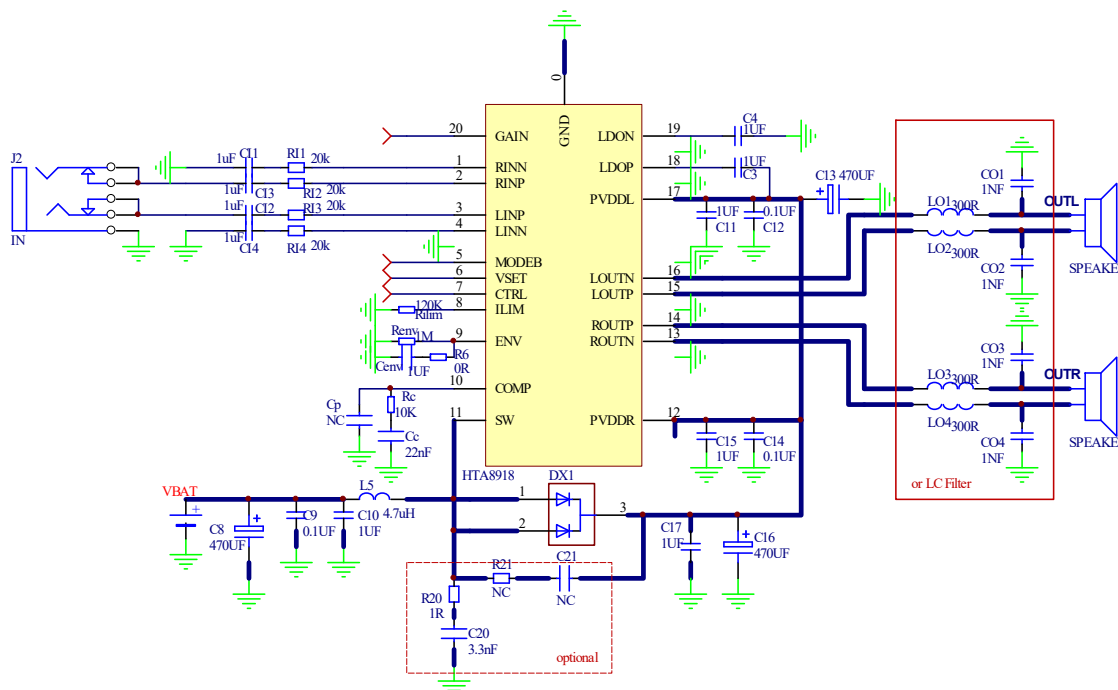
HTA8918内置的升压电路，具有三种模式：自适应音频跟踪模式、自适应多段升压模式及强制升压模式。在强制升压模式，升压电路直接升压至预设的电压（VSET脚设置）并提供给音频功放；在自适应多段升压模式，升压电路可为音频功率放大器提供适合输出功率的不同电源电压，从而提供效率；在自适应音频跟踪模式，升压电路可为音频功率放大器提供实时跟随音源信号的电源供电，从而在整个功率段内使整个系统保持在高效率。自适应多段升压模式和自适应音频跟踪模式，相比直接强制升压供电方式，电池续航时间通常可提升50%以上。

此外，HTA8918内部集成免滤波器调制技术，能够直接驱动扬声器，内置的关断功能使待机电流最小化，还集成了输出端过流保护、片内过温保护、输入电源欠压异常保护、升压电压过压保护等功能。

HTA8918具有防削顶失真（ACF）输出控制功能，可检测并抑制由于输入音乐、语音信号幅度过大所引起的输出信号削顶失真（破音），也能自适应地防止在BOOST升压电压下降所造成的输出削顶，显著提高音质，创造非常舒适的听音享受，并保护扬声器免受过载损坏。

¹ Depends on different types of music, different values of powers and voltages, the real battery endurance could be highly different.

■ TYPICAL APPLICATION



1. 系统增益设置

GAIN pin	D类增益	D类时芯片内部输入电阻 RIN与反馈电阻RF	AB类增益	AB类时芯片内部输入电阻 RIN与反馈电阻RF
High (接LDON)	40倍 (32dB)	RF = 800k, RIN = 20k	32倍 (30dB)	RF = 640k, RIN = 20k
Low (接GND)	20倍 (26dB)	RF = 400k, RIN = 20k	16倍 (24dB)	RF = 320k, RIN = 20k

外部增加输入电阻 R_i 时, 增益 (dB) = $20 \times \log \frac{R_F}{R_{iN+1}}$

2. MODEB脚设置升压模式

MODEB pin	升压模式
High (接LDON)	自适应实时音频跟踪升压
Floating (悬空)	自适应多段升压
Low (接GND)	强制升压

3. VSET脚设置升压的最高输出电压

VSET pin	强制升压模式时，输出电压	多端升压or音频实时跟踪模式时，最高输出电压	OVP电压
High (接LDON)	11.5V	11.5V	12V
Float	10V	10V	11V
Low(接GND)	8V	8V	9V

4. CTRL 脚设置芯片的工作模式

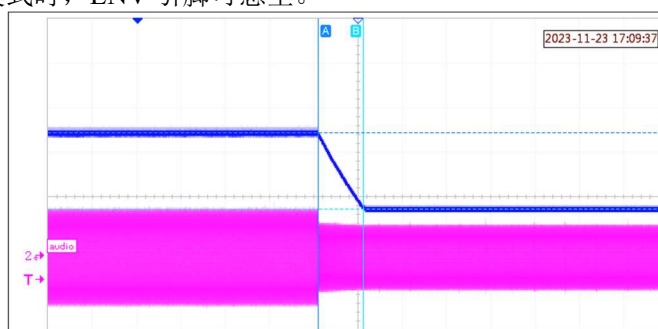
CTRL pin	工作模式
>2V	Class D, ACF off
1.6~1.9V	Class D, ACF on
0.8~1.5V	Class AB, ACF off
Low	Shutdown

5. ILIM 脚设置升压电感的峰值电流限值

R _{ILIM} 电阻值	升压电感的峰值电流限值	
	强制升压模式 多段升压模式	音频实时跟踪模式
330k	不使用	9A
150k	10A	6A
120k	9A	5.1A
100k	7.8A	4.6A
75k	5A	3.2A

6. ENV 引脚设置自适应实时音频跟踪升压模式下的音频跟踪释放时间

MODEB 设置为自适应实时音频跟踪升压时，ENV 引脚可用来设置音频跟踪的释放时间，如下图所示。推荐的 ENV 网络值 C_{ENV}=1uF, R_{ENV}=1M，可在大部分情况下使用。
MODEB 固定设置为其他模式时，ENV 引脚可悬空。



音频跟踪的释放时间

7. COMP 引脚设置升压的环路补偿电路，R_c = 10k, C_c = 22nF，可在大部分情况下使用。

8 为减小 SW 毛刺和辐射，SW 端建议预留 R20+C20 (1R+3.3nF)到地的网络，以及 R21 和 C21 (1R+3.3nF) 的 RC 网络。

9. 电感选择：推荐使用 4.7uH 电感，饱和电流应大于设置的 ILIM 值。

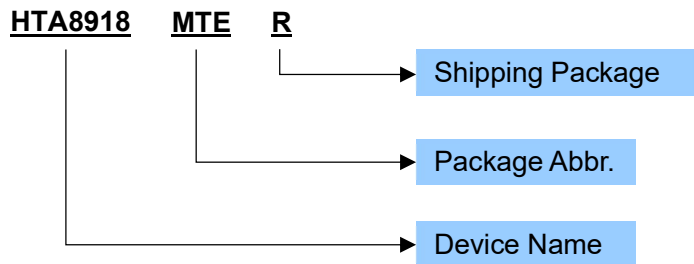
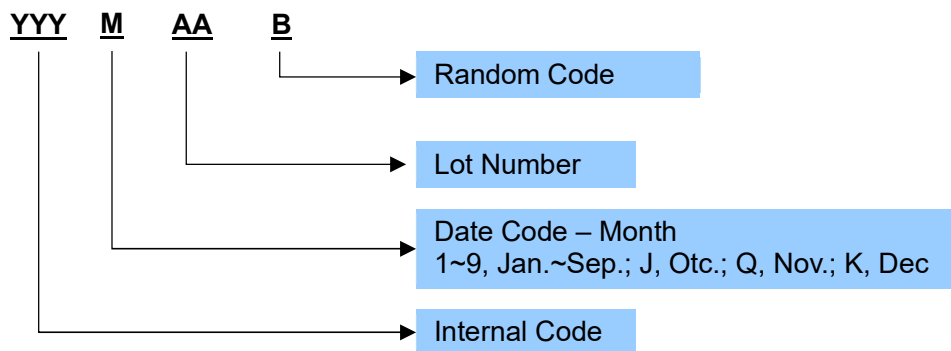
10. 二极管选择：反向电压 V_R 推荐 > 20V，额定电流 I_F 推荐>2ch*最高升压值/负载电阻值，推荐使用 SS1020，或两个 SS52 并联。

11. PVDD 电容：一般的，为保证低频的功率，在靠近二极管的输出电压处放置 1uF//470uF，并尽可能靠近相邻的 PVDDR 且使用粗走线连接，靠近 PVDDR 处再放置 1uF//0.1uF；靠近 PVDDL 处再放置 1uF//0.1uF//470uF。

12. 辐射和传导是关注项时，输出建议预留 LC 滤波器，即 LO 改成电感 10uH，CO 改成电容 0.68uF。

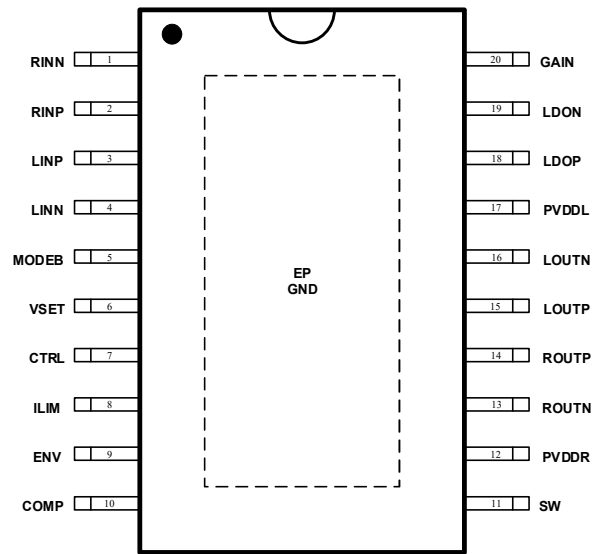
ORDERING INFORMATION

Part Number	Package Type	Package Abbr.	Eco Plan	MSL Level	Marking	Shipping Package / MOQ
HTA8918MTER	ETSSOP20	MTE	RoHS	MSL3	HTA8918 YYYMAAB ¹	Tape and Reel (R) / 3000pcs

Part Number

Production Tracking Code


¹ YYYMAAB is production tracking code
 Copyright©2025, Heroic Technology

■ TERMINAL CONFIGURATION



Top View

■ TERMINAL FUNCTION

Terminal No.	Name	Description
1	RINN	Negative input (differential-) for audio amplifier of right channel. 音频右声道输入负端。
2	RINP	Positive input (differential+) for audio amplifier of right channel. 音频右声道输入正端。
3	LINP	Positive input (differential+) for audio amplifier of left channel. 音频左声道输入正端。
4	LINN	Negative input (differential-) for audio amplifier of left channel. 音频左声道输入负端。
5	MODEB	Boost converter mode selection. 升压模式选择
6	VSET	Select the (max) output voltage of the boost converter. 升压输出最高电压选择
7	CTRL	Select the working mode. 工作模式选择
8	ILIM	Adjustable switch peak current limit. An external resistor should be connected between this pin and GND. 最大限流值设置端，外部接电阻到地。
9	ENV	Release time network setting for audio tracking. 音频跟踪释放时间设置
10	COMP	Output of the internal error amplifier, the loop compensation network should be connected between this pin and the GND pin. 接阻容补偿网络到地。
11	SW	The switching node pin of the converter. 升压开关节点。
12	PVDDR	Power Supply for internal power circuitry of Channel R. 右声道功率电源
13	ROUTN	Negative pin for differential speaker amplifier output R. 右声道输出负端
14	ROUTP	Positive pin for differential speaker amplifier output R. 右声道输出正端
15	LOUTP	Positive pin for differential speaker amplifier output L. 左声道输出正端
16	LOUTN	Negative pin for differential speaker amplifier output L. 左声道输出负端
17	PVDDL	Power Supply for internal power circuitry of Channel L. 左声道功率电源
18	LDOP	Internal LDO output, connect 1uF to PVDD 内部LDO输出，连接1uF到PVDD
19	LDON	Internal LDO output, connect 1uF to GND 内部LDO输出，连接1uF到地
20	GAIN	Gain select pin. 增益选择。
EP	GND	Provides both electrical and thermal connection from the device to the board. A matching ground pad must be provided on the PCB and the device connected to it via solder. For proper electrical operation, this ground pad must be connected to the system ground. 既是地，又是散热PAD

IMPORTANT NOTICE**注意**

Heroic Electronic Technology (Jiaxing) Co., Ltd (HT) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any products or services. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

禾润电子科技（嘉兴）股份有限公司（以下简称HT）保留对产品、服务、文档的任何修改、更正、提高、改善和其他改变，或停止提供任何产品和服务的权利。客户在下单和生产前应确保所得到的信息是最新、最完整的。

HT assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using HT components.

HT对相关应用的说明和协助以及客户产品的板级设计不承担任何责任。

HT products are not authorized for use in safety-critical applications (such as life support devices or systems) where a failure of the HT product would reasonably be expected to affect the safety or effectiveness of that devices or systems.

HT的产品并未授权用于诸如生命维持设备等安全性极高的应用中。

The information included herein is believed to be accurate and reliable. However, HT assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

本文中的相关信息是精确和可靠的，但HT并不对其负责，也不对任何可能的专利和第三方权利的侵害负责。

Following are URLs and contacts where you can obtain information or supports on any HT products and application solutions:

下面是可以联系到我公司的相关链接和联系方式：

禾润电子科技（嘉兴）股份有限公司
Heroic Electronic Technology (Jiaxing) Co., Ltd.

地址：浙江省嘉兴市南湖区亚太路906号科创CBD园区21号楼11层

Add: 11th floor, Building 21, No. 906, Yatai Road, Jiaxing, Zhejiang Province

Sales: 0573-82586608, sales@heroic.com.cn

Support: 0573-82586151, support@heroic.com.cn

Website: www.heroic.com.cn; wap.heroic.com.cn

Wechat MP: HEROIC_JX

请及时关注禾润官方微信公众号，随时获取最新产品信息和技术资料！

